



# Cane Corso Pro Series

Cellular + Starlink Roof Mount Antenna

Parsec's Newest Evolution for Public Sector




# Cane Corso Pro Series



## Cellular + Starlink All-in-One Mobile Package

The Parsec Cane Corso Series is a powerful, fully integrated external antenna that consolidates fourteen functions into a single, low-profile, waterproof unit. Its design streamlines connectivity hardware while delivering maximum reliability in the harshest conditions.

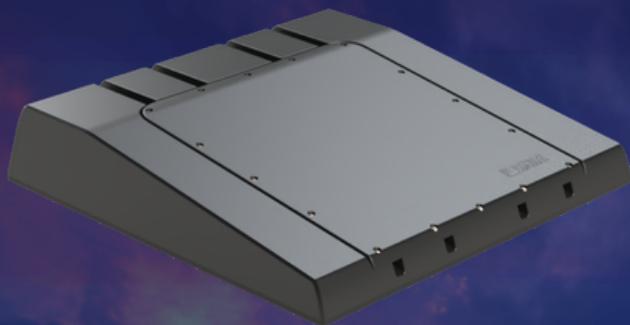


- Dual 4X4 MIMO 5G Cellular
- 4X4 MIMO Wi-Fi
- Omni-Directional
- Optional GPS/Bluetooth
- Low Profile

### High Capacity Antenna System

#### Maximum Throughput

The Cane Corso delivers robust multi-network performance through nine elements, including a Dual 4x4 MIMO Cellular Network for two simultaneous modems and reliable, high-bandwidth failover. Its 4x4 MIMO Wi-Fi elements provide stable connectivity for vehicles and field operations, while the rugged omni-directional design maintains coverage across all major North American bands. An integrated GNSS element enhances navigation and asset tracking accuracy.

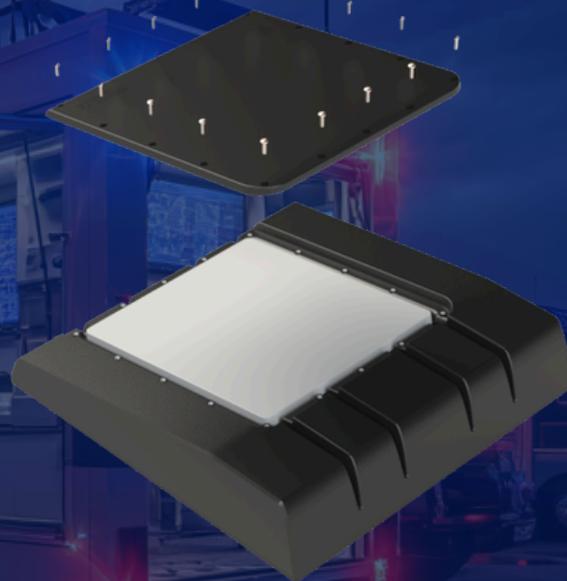



# Cane Corso Pro Series



## Cellular + Starlink All-in-One Mobile Package

### Starlink-Ready Design All-In-One Connectivity

A defining feature of the Cane Corso is its specialized Starlink mounting solution, designed to support the Starlink Mini satellite terminal directly on top of the antenna housing. This rugged, field-serviceable design keeps the Starlink component protected yet easily accessible.

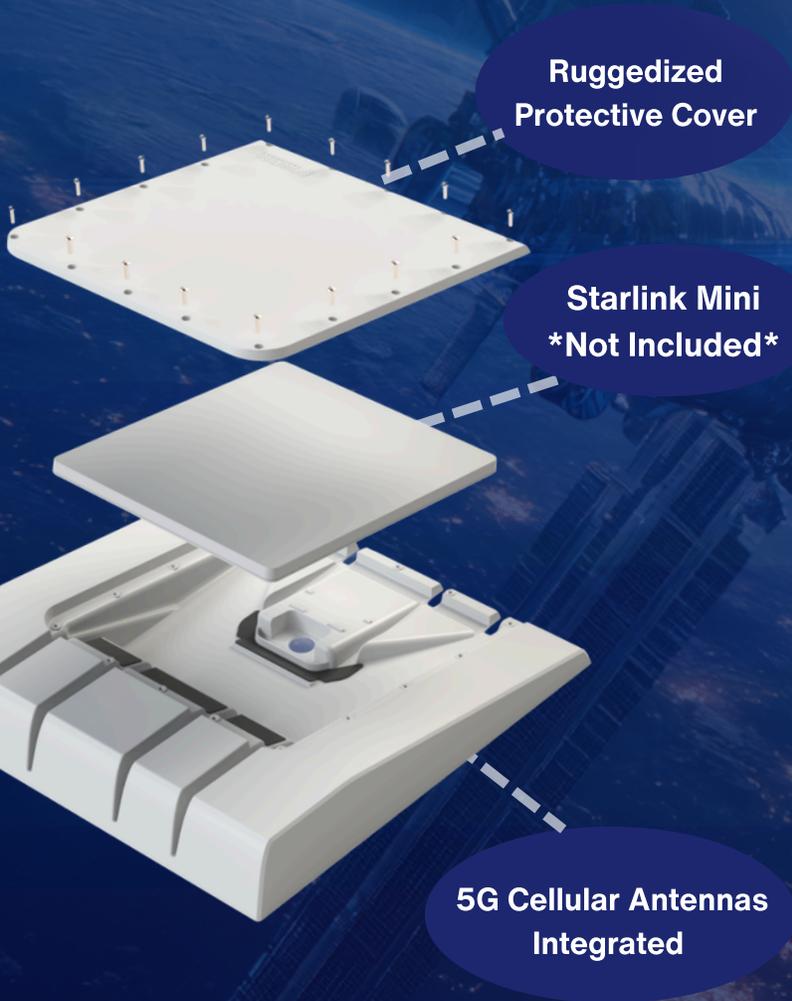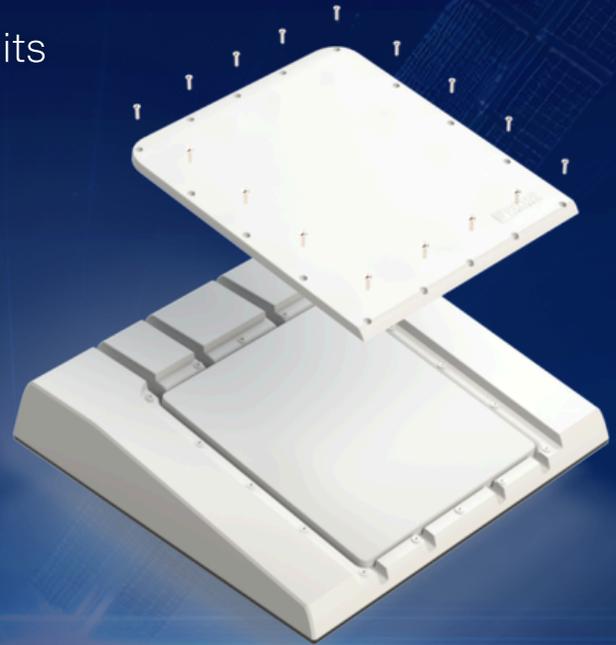

### Low-Profile Design

By integrating cellular, Wi-Fi, GNSS, and a Starlink-ready mount, the Cane Corso consolidates multiple network technologies into a single, streamlined system. The rugged housing, low-profile design, and omni-directional performance make the Cane Corso ideal for environments where durability, uptime, and versatility are non-negotiable.

# Cane Corso Pro Series



Cellular + Starlink All-in-One Mobile Package

## Designed for Reliable, Flexible Installation


### Connectivity for Any Mission

The Cane Corso Series prioritizes durability and flexible deployment.

The standard installation uses a single 1.5" NPT threaded mounting hole, providing a secure, permanent connection suitable for vehicles, structures, and fixed assets.

#### Mounting Options

- Standard 1.5" NPT (1.900 inches) Permanent Mount
- Optional Magnetic Mount
- Optional Pole Mount

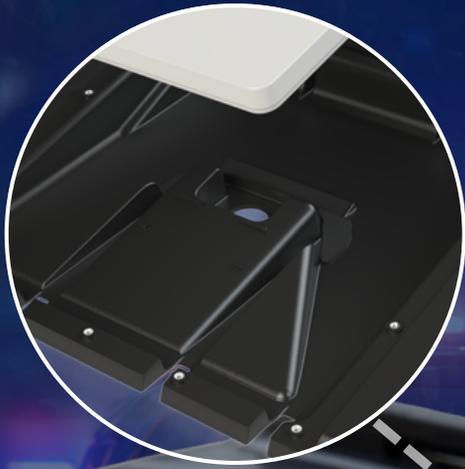

\*Raised Up Because of PoC Magnetic Mount\*

# Designed with Purpose

## Applications



Ambulances



Police & Fire



Urban Cities



Command Centers




Remote Video  
Monitoring




Long Distance Connection

## Why Choose the Cane Corso

- Dual 4X4 MIMO 5G Cellular
- 4X4 MIMO Wi-Fi
- Omni-Directional
- Optional GPS/Bluetooth
- 600 - 6000 MHz
- Wi-Fi 6 Compatible
- Low Profile

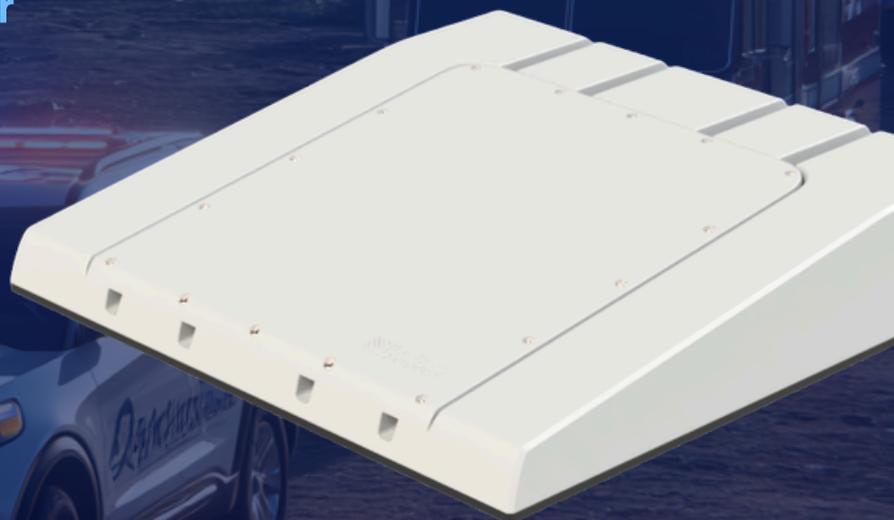

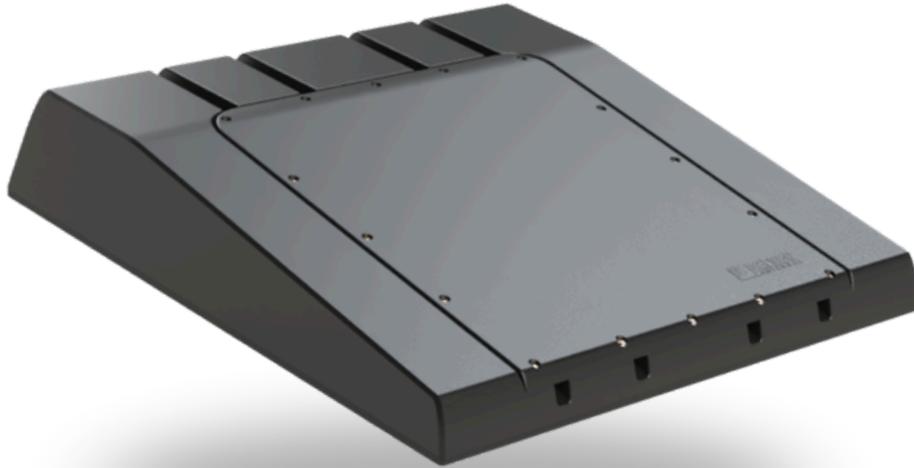


## Specification Overview

PRO Cane Corso Series		
<b>Applications</b>	Public Safety, Vehicle Fleets, Command Centers	
<b>Configurations</b>	14:1 - 9 CELL, 4 Wi-Fi, GPS OR 8 CELL, LMR, 4 Wi-Fi, GPS	
<b>Categories:</b>	Public Safety, RVs, Enterprise	
<b>Antennas Included:</b>	Cellular, LMR, Wi-Fi, and GPS	
<b>Mount Type</b>	Roof Mount	
<b>Mounting Accessories Available</b>	Pole Mount, Mag Mount	
<b>Antenna Pattern:</b>	Omni-Directional	
<b>Available Colors:</b>	Black and White	
<b>Cable Type:</b>	Cellular	LSR200
	Wi-Fi	LSR200
	GPS	LSR100
<b>Standard Cable Length</b>	1 FT, 15 FT	
<b>Standard Connector Options</b>	Cellular	SMA(M)
	LMR	TNC(M)
	Wi-Fi	RP-SMA(M)
	GPS	SMA(M)

## Specifications

<b>Frequencies</b>			
<b>4G/5G Cellular</b>	617-894 MHz 1695-2700 MHz 3300-4100 MHz 4500-5925 MHz	<b>Wi-Fi</b>	2400 - 2483.5 MHz 4900 - 5900 MHz
		<b>GPS</b>	1575.42 MHz
		<b>LMR</b>	450-512 MHz 700 - 800 MHz 900 Mhz
<b>4G/5G Bands</b>			
<b>North America</b>		B2, B4, B5, B7, B12, B13, B14, B17, B25, B26, B29, B30, B41, B46, B48, B66, B71 n2, n5, n12, n25, n26, n41, n48, n66, n70, n71, n77, n79	
<b>EMEA</b>		B1, B3, B7, B20, B28, B42, B43, B46 n1, n3, n28, n77, n78	
<b>Mechanical</b>		<b>Enviromental</b>	
<b>Dimension</b>	17.77 inch length, 17.41 inch width, 3.18 inch height,	<b>Operating Temperature</b>	-40 °C to 85°C
<b>Mounting</b>	1.5 NPT Mounting Hole Major Diameter 1.900"	<b>Ingress Protection</b>	IP67 Waterproof
<b>RF Cable Length</b>	1 FT or 15 FT	<b>Radome Material</b>	UV Resistant Polymer
<b>Connectors</b>	CELL: SMA(M) Wi-Fi: RP-SMA(M) GPS: SMA(M)	<b>Cable Type</b>	CELL: LSR200 Wi-Fi: LSR200 GPS: LSR100
For customizations, such as Connector Type, Cable Length, Color Configuration, and Branding, please reach out to Parsec at sales@parsec-t.com			

## Dimensions

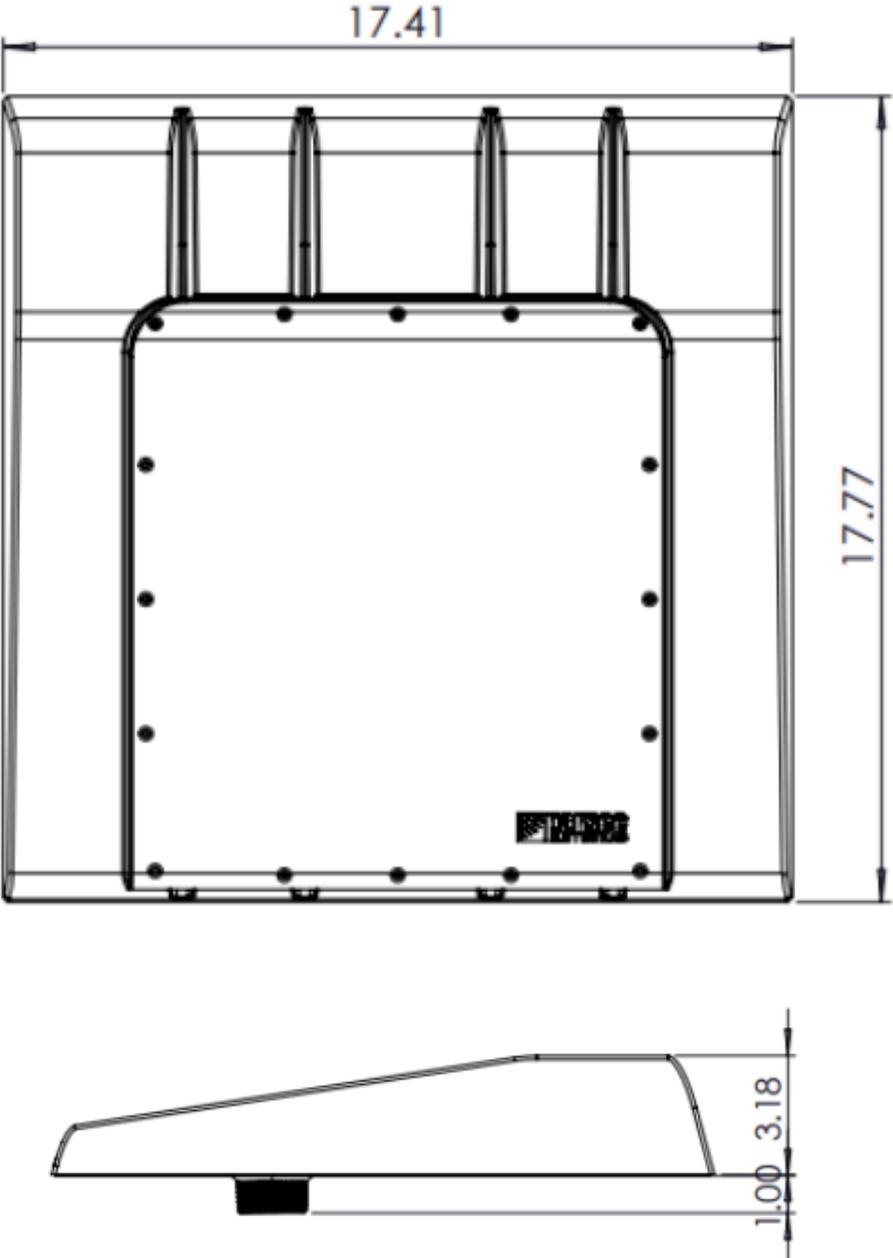

## Electrical Specification

<i>ID</i>	<i>Port</i>	<i>Parameters</i>	<i>Typ.</i>	
<b>Radiated Efficiency (%)</b>	CELL 1, 5	617 – 663 MHz	50	
	CELL 1, 5	663 – 798 MHz	55	
	CELL 1, 5	798 – 894 MHz	60	
	CELL 1, 5	1695 – 2110 MHz	70	
	CELL 1, 5	2110 – 2700 MHz	80	
	CELL 1, 5	3300 – 4100 MHz	80	
	CELL 1, 5	4500 – 5925 MHz	70	
	CELL 2, 6	617 – 663 MHz	50	
	CELL 2, 6	663 – 798 MHz	55	
	CELL 2, 6	798 – 894 MHz	55	
	CELL 2, 6	1695 – 2110 MHz	75	
	CELL 2, 6	2110 – 2700 MHz	80	
	CELL 2, 6	3300 – 4100 MHz	80	
	CELL 2, 6	4500 – 5925 MHz	70	
	CELL 3, 7	617 – 663 MHz	35	
	CELL 3, 7	663 – 798 MHz	40	
	CELL 3, 7	798 – 894 MHz	45	
	CELL 3, 7	1695 – 2110 MHz	70	
	CELL 3, 7	2110 – 2700 MHz	80	
	CELL 3, 7	3300 – 4100 MHz	75	
	CELL 3, 7	4500 – 5925 MHz	70	
	CELL 4, 8	617 – 663 MHz	50	
	CELL 4, 8	663 – 798 MHz	55	
	CELL 4, 8	798 – 894 MHz	65	
	CELL 4, 8	1695 – 2110 MHz	70	
	CELL 4, 8	2110 – 2700 MHz	80	
	CELL 4, 8	3400 – 4100 MHz	80	
	CELL 4, 8	4500 – 5925 MHz	70	
	WiFi 1 thru 4	2400 – 2483.5 MHz	80	
	WiFi 1 thru 4	4900 – 5900 MHz	70	
	<b>Peak Gain (dBi)</b>	CELL 1, 5	617 – 663 MHz	2.5
		CELL 1, 5	663 – 798 MHz	2.5
CELL 1, 5		798 – 894 MHz	4	
CELL 1, 5		1695 – 2110 MHz	6	
CELL 1, 5		2110 – 2700 MHz	6.5	
CELL 1, 5		3300 – 4100 MHz	7.5	
CELL 1, 5		4500 – 5925 MHz	7.5	
CELL 2, 6		617 – 663 MHz	2.5	

	CELL 2, 6	663 – 798 MHz	3.5
	CELL 2, 6	798 – 894 MHz	5
	CELL 2, 6	1695 – 2110 MHz	5
	CELL 2, 6	2110 – 2700 MHz	6.5
	CELL 2, 6	3300 – 4100 MHz	8
	CELL 2, 6	4500 – 5925 MHz	7
	CELL 3, 7	617 – 663 MHz	0.5
	CELL 3, 7	663 – 798 MHz	1
	CELL 3, 7	798 – 894 MHz	2
	CELL 3, 7	1695 – 2110 MHz	5
	CELL 3, 7	2110 – 2700 MHz	6.5
	CELL 3, 7	3300 – 4100 MHz	7.5
	CELL 3, 7	4500 – 5925 MHz	7.5
	CELL 4, 8	617 – 663 MHz	1
	CELL 4, 8	663 – 798 MHz	1
	CELL 4, 8	798 – 894 MHz	1.5
	CELL 4, 8	1695 – 2110 MHz	5
	CELL 4, 8	2110 – 2700 MHz	6
	CELL 4, 8	3300 – 4100 MHz	7.5
	CELL 4, 8	4500 – 5925 MHz	7.5
	WiFi 1 thru 4	2400 – 2483.5 MHz	5
	WiFi 1 thru 4	4900 – 5900 MHz	6
<b>Return Loss 50 Ω (dB)</b>	CELL 1, 5	617 – 663 MHz	8
	CELL 1, 5	663 – 798 MHz	10
	CELL 1, 5	798 – 894 MHz	10
	CELL 1, 5	1695 – 2000 MHz	8
	CELL 1, 5	2000 – 2700 MHz	10
	CELL 1, 5	3300 – 4100 MHz	10
	CELL 1, 5	4500 – 5000 MHz	12
	CELL 1, 5	5000 – 5925 MHz	8
	CELL 2, 6	617 – 663 MHz	10
	CELL 2, 6	663 – 798 MHz	8
	CELL 2, 6	798 – 894 MHz	6
	CELL 2, 6	1695 – 2000 MHz	8
	CELL 2, 6	2000 – 2700 MHz	10
	CELL 2, 6	3300 – 4100 MHz	10
	CELL 2, 6	4500 – 5000 MHz	12
	CELL 2, 6	5000 – 5925 MHz	8

	CELL 3, 7	617 – 663 MHz	8
	CELL 3, 7	663 – 798 MHz	6
	CELL 3, 7	798 – 894 MHz	5
	CELL 3, 7	1695 – 2000 MHz	8
	CELL 3, 7	2000 – 2700 MHz	10
	CELL 3, 7	3300 – 4100 MHz	10
	CELL 3, 7	4500 – 5000 MHz	12
	CELL 3, 7	5000 – 5925 MHz	8
	CELL 4, 8	617 – 663 MHz	8
	CELL 4, 8	663 – 798 MHz	10
	CELL 4, 8	798 – 894 MHz	9
	CELL 4, 8	1695 – 2000 MHz	8
	CELL 4, 8	2000 – 2700 MHz	10
	CELL 4, 8	3300 – 3700 MHz	10
	CELL 4, 8	4500 – 5000 MHz	12
	CELL 4, 8	5000 – 5925 MHz	8
	WiFi 1 thru 4	2400 – 2483.5 MHz	10
	WiFi 1 thru 4	4900 – 5900 MHz	10
<b>Isolation (dB)</b>	CELL-MIMO	617 – 652 MHz	14
	CELL-MIMO	652 – 859 MHz	16
	CELL-MIMO	859 – 894 MHz	18
	CELL-MIMO	1695 – 2110 MHz	16
	CELL-MIMO	2110 – 2700 MHz	18
	CELL-MIMO	3300 – 4100 MHz	22
	CELL-MIMO	4500 – 5925 MHz	25
	CELL-Adjacent	617 – 652 MHz	7
	CELL-Adjacent	652 – 859 MHz	6.5
	CELL-Adjacent	859 – 894 MHz	8
	CELL-Adjacent	1695 – 2110 MHz	12
	CELL-Adjacent	2110 – 2700 MHz	14
	CELL-Adjacent	3300 – 4100 MHz	22
	CELL-Adjacent	4500 – 5925 MHz	22
WiFi	2400 – 2483.5 MHz	12	
WiFi	4900 – 5900 MHz	22	
<b>Polarization (dBi)</b>	CELL, WiFi		Linear
<b>Max Input Power (Watts)</b>	CELL, WiFi		5

<b>RF Connectors</b>	CELL WiFi		SMA(M) RP-SMA(M)
<b>RF Cable Type</b>	CELL, WiFi		LSR200
<ul style="list-style-type: none"> <li>• Isolation, return loss, and peak gain do not include cable loss.</li> <li>• CELL-MIMO isolation is the isolation between elements grouped for 4X4 MIMO for one modem.</li> <li>• CELL-Adjacent isolation is the isolation between adjacent elements for separate modems.</li> <li>• Electrical specifications based on antenna mounted away from other conductors.</li> </ul>			

## GNSS Electrical Specifications

<i>ID &amp; Unit</i>	<i>Port</i>	<i>Parameters</i>	<i>Typ.</i>
<b>Antenna + Preamp Gain (dBic)</b>	GPS	1570 - 1581 MHz	28
<b>Polarization</b>	GPS		RHCP
<b>Filter Rejection (dB)</b>	GPS	1625 MHz	12
<b>GNSS Preamp Voltage (mA)</b>	GPS		2.2 to 5
<b>GNSS Preamp Current (mA)</b>	GPS		5 to 15
<b>RF Connector</b>	GPS		SMA(M)
<b>RF Cable Type</b>	GPS		LSR100

## Ordering Guide

### Maximum Configurations

<i>Config.</i>	<i>Part Number</i>	<i>Description</i>
<b>14:1</b>	PRO14CC8L4WGB	9 Cellular, 4 Wi-Fi, GPS, 15 ft Cable, Black
For customizations, such as Connector Type, Cable Length, Color, Configuration, and Branding, please reach out to Parsec at sales@parsec-t.com		

## Part Number Key

Part Number Example for a 14:1 Cane Corso: PRO14CC9L4WG15B

<i>Description</i>	<i>Abbreviation</i>	<i>Part Number</i>
All PRO Series	PRO	PRO
Number of Antenna in Housing/Configuration	14:1	PRO14
Antenna Abbreviation for Cane Corso	CC	PRO14CC
Number of Cellular Elements	#L	PRO14CC9L
Number of Wi-Fi Elements	#W	PRO14CC9L4W
Number of GPS Elements	G	PRO14CC9L4WG
Cable Length Measured in Feet: 01 = 1 FT	01, 06, 15, etc	PRO14CC9L4WG15
Optional L Version - Includes the Options Listed	B or W	PRO14CC9L4WG15B
Customization options available: Custom Cable Lengths, Custom Colors, Custom Connectors, Cable Kits, Marine Grade, Custom Cable Labelling. MOQ Applicable. Please contact us for more information at sales@parsec-t.com.		

## Hardware Accessories

<i>Accessories</i>	<i>Part Number</i>
Ground Plane with Adhesive Back, 20 in x 20 in, Can Be Cut to Size	PTA0587
Lightning Arrestor - SMA(F) to SMA(F)	PTA0476
Lightning Arrestor - N(F) to N(M)	PTA0736
SMA Wrench, Key Chain	PTA0194
Service: Cable Sleeving (Priced Per Ft)	Cable Sleeving