



Cane Corso Pro Series

Cellular + Starlink Roof Mount Antenna

Parsec's Newest Evolution for Public Sector




Cane Corso Pro Series



Cellular + Starlink All-in-One Mobile Package

The Parsec Cane Corso Series is a powerful, fully integrated external antenna that consolidates fourteen functions into a single, low-profile, waterproof unit. Its design streamlines connectivity hardware while delivering maximum reliability in the harshest conditions.

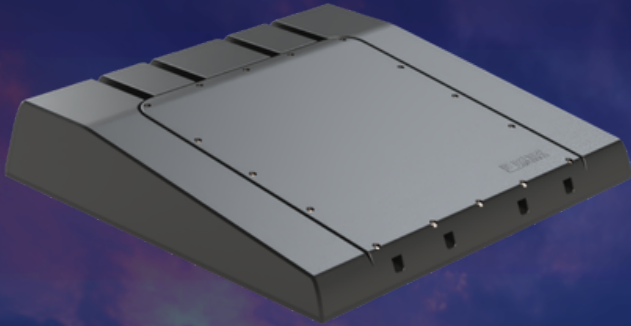


- Dual 4X4 MIMO 5G Cellular
- 4X4 MIMO Wi-Fi
- Omni-Directional
- Optional GPS/Bluetooth
- Low Profile

High Capacity Antenna System

Maximum Throughput

The Cane Corso delivers robust multi-network performance through nine elements, including a Dual 4x4 MIMO Cellular Network for two simultaneous modems and reliable, high-bandwidth failover. Its 4x4 MIMO Wi-Fi elements provide stable connectivity for vehicles and field operations, while the rugged omni-directional design maintains coverage across all major North American bands. An integrated GNSS element enhances navigation and asset tracking accuracy.

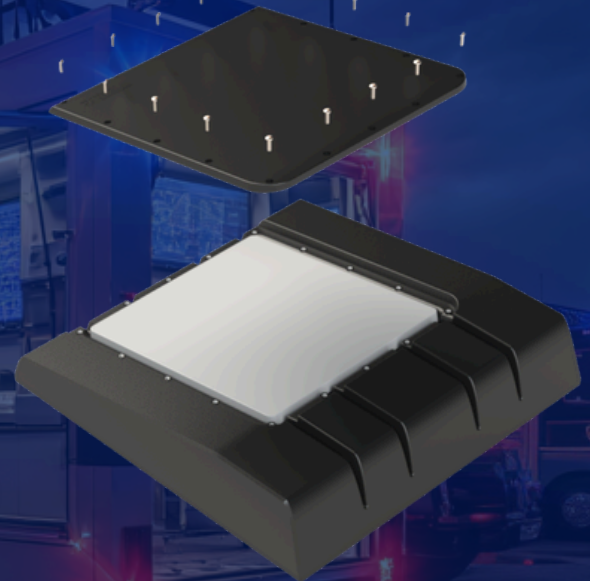



Cane Corso Pro Series



Cellular + Starlink All-in-One Mobile Package

Starlink-Ready Design All-In-One Connectivity

A defining feature of the Cane Corso is its specialized Starlink mounting solution, designed to support the Starlink Mini satellite terminal directly on top of the antenna housing. This rugged, field-serviceable design keeps the Starlink component protected yet easily accessible.

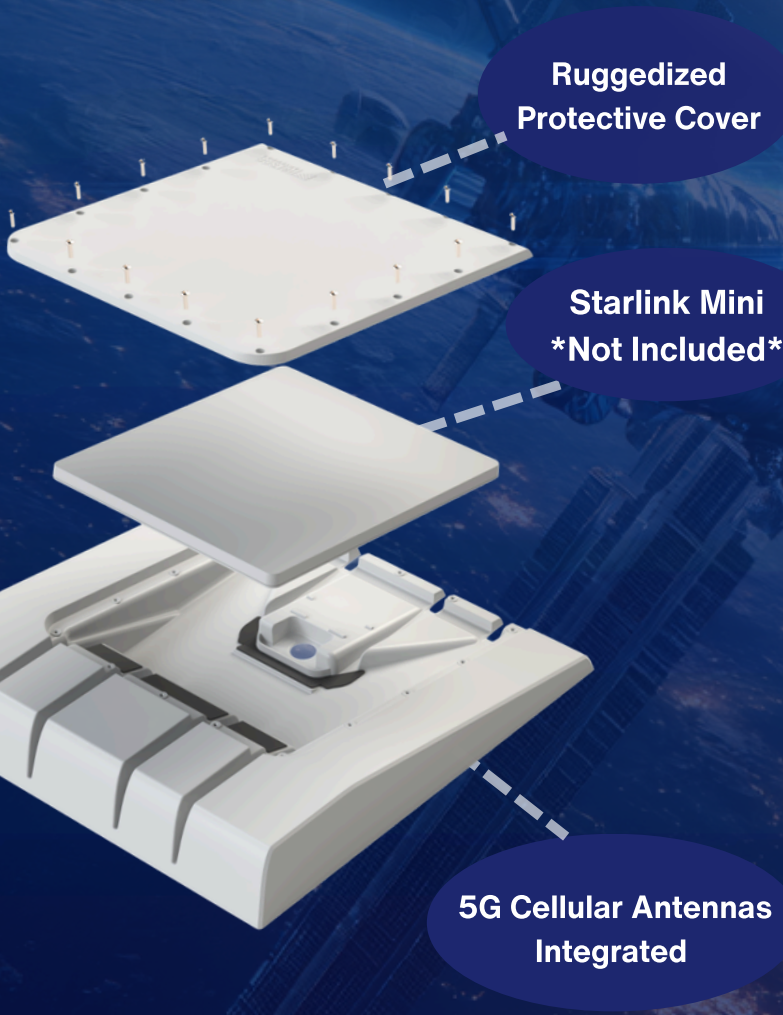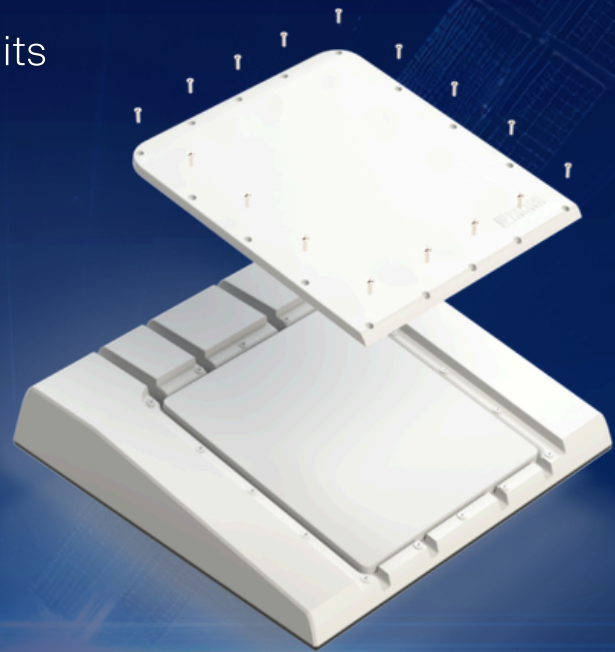

**Ruggedized
Protective Cover**

**Starlink Mini
*Not Included***

**5G Cellular Antennas
Integrated**

Low-Profile Design

By integrating cellular, Wi-Fi, GNSS, and a Starlink-ready mount, the Cane Corso consolidates multiple network technologies into a single, streamlined system. The rugged housing, low-profile design, and omni-directional performance make the Cane Corso ideal for environments where durability, uptime, and versatility are non-negotiable.

Cane Corso Pro Series



Cellular + Starlink All-in-One Mobile Package

Designed for Reliable, Flexible Installation



Connectivity for Any Mission

The Cane Corso Series prioritizes durability and flexible deployment.

The standard installation uses a single 1.5" NPT threaded mounting hole, providing a secure, permanent connection suitable for vehicles, structures, and fixed assets.

Mounting Options

- Standard 1.5" NPT (1.900 inches) Permanent Mount
- Optional Magnetic Mount
- Optional Pole Mount

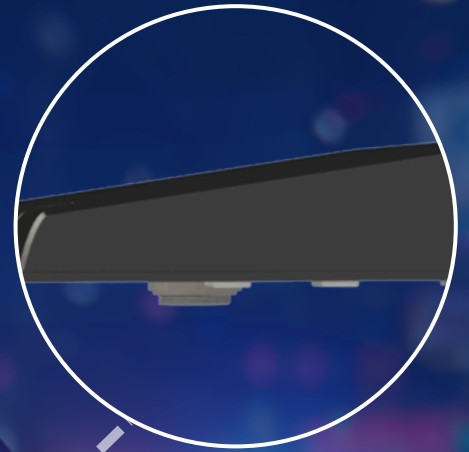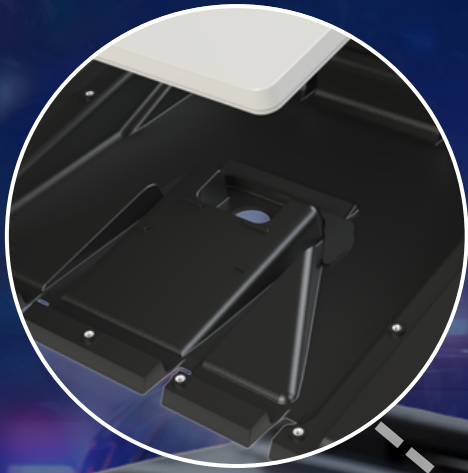

Raised Up Because of PoC Magnetic Mount

Designed with Purpose

Applications



Ambulances



Police & Fire



Urban Cities



Command Centers




Remote Video
Monitoring




Long Distance Connection

Why Choose the Cane Corso

- Dual 4X4 MIMO 5G Cellular
- 4X4 MIMO Wi-Fi
- Omni-Directional
- Optional GPS/Bluetooth
- 600 - 6000 MHz
- Wi-Fi 6 Compatible
- Low Profile

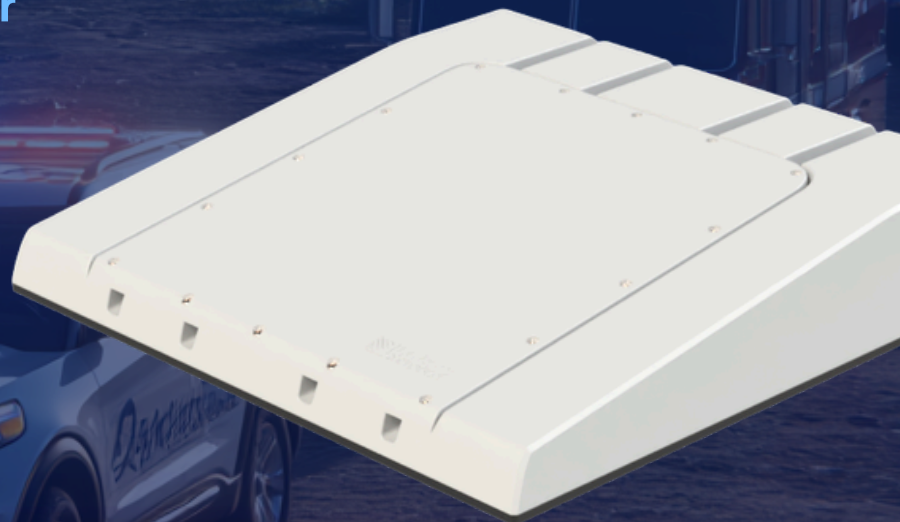

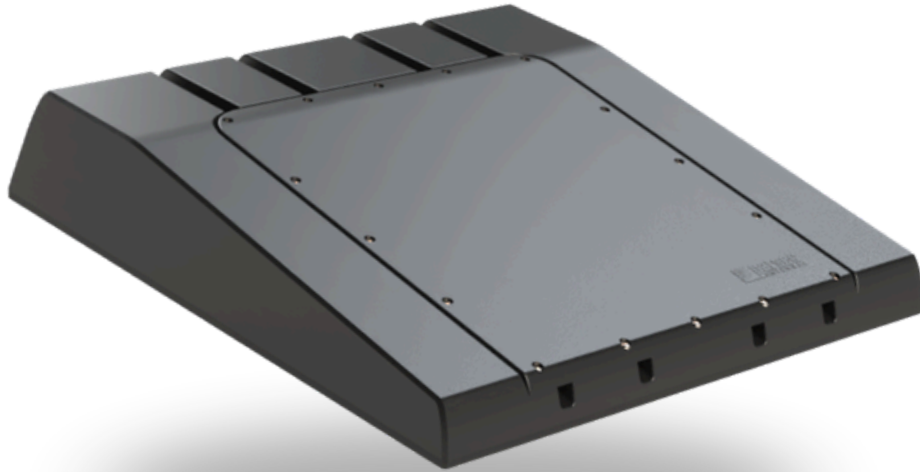


Specification Overview

PRO Cane Corso Series		
Applications	Public Safety, Vehicle Fleets, Command Centers	
Configurations	14:1 – 9 CELL, 4 Wi-Fi, L1/L5 Dual Band GPS* 14:1 - 8 CELL, LMR, 4 Wi-Fi, L1/L5 Dual Band GPS*	
Categories:	Public Safety, RVs, Enterprise	
Antennas Included:	Cellular, LMR, Wi-Fi, and GPS	
Mount Type	Roof Mount	
Mounting Accessories Available	Pole Mount, Mag Mount	
Antenna Pattern:	Omni-Directional	
Available Colors:	Black and White	
Cable Type:	Cellular	LSR200
	Wi-Fi	LSR200
	GPS	LSR100
Standard Cable Length	1 FT, 15 FT	
Standard Connector Options	Cellular	SMA(M)
	LMR	TNC(M)
	Wi-Fi	RP-SMA(M)
	GPS	SMA(M)

Specifications

<i>Frequencies</i>			
4G/5G Cellular	617-894 MHz 1695-2700 MHz 3300-4100 MHz 4500-5925 MHz	LMR	450-512 MHz 700/800 MHz 900 MHz
L1 GPS	1575.42 MHz	Wi-Fi	2400-2483.5 MHz 4900-5900 MHz
L1/L5 Dual Band GPS	1563 – 1587 MHz 1164 – 1189 MHz		
<i>4G/5G Bands</i>			
North America		B2, B4, B5, B7, B12, B13, B14, B17, B25, B26, B29, B30, B41, B46, B48, B66, B71 n2, n5, n12, n25, n26, n41, n48, n66, n70, n71, n77, n79	
EMEA		B1, B3, B7, B20, B28, B42, B43, B46 n1, n3, n28, n77, n78	
<i>Mechanical</i>		<i>Enviromental</i>	
Dimension	17.77 inch length, 17.41 inch width, 3.18 inch height,	Operating Temperature	-40 °C to 85°C
Mounting Hole	½ NPT mounting hole	Ingress Protection	IP67 Waterproof
RF Cable Length	1 FT or 15 FT	Radome Material	Plastic with UV Additive
Connectors	CELL: SMA(M) Wi-Fi: RP-SMA(M) GPS: SMA(M)	Cable Type	CELL: LSR200 Wi-Fi: LSR200 GPS: LSR100
For customizations, such as Connector Type, Cable Length, Color Configuration, and Branding, please reach out to Parsec at sales@parsec-t.com			

Dimensions

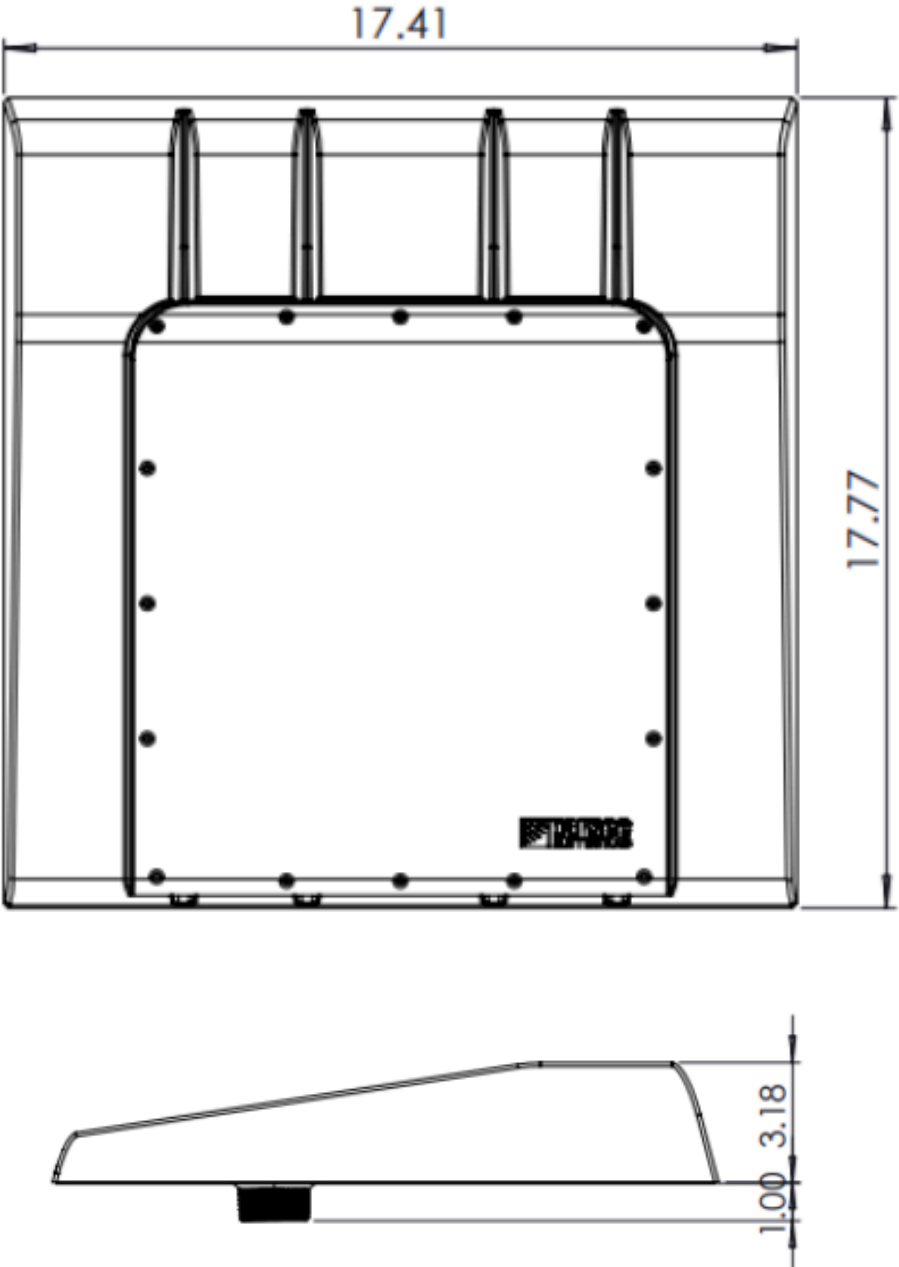

Electrical Specification

<i>ID</i>	<i>Port</i>	<i>Parameters</i>	<i>Typ.</i>	
Radiated Efficiency (%)	CELL 1, 5	617 – 663 MHz	50	
	CELL 1, 5	663 – 798 MHz	55	
	CELL 1, 5	798 – 894 MHz	60	
	CELL 1, 5	1695 – 2110 MHz	70	
	CELL 1, 5	2110 – 2700 MHz	80	
	CELL 1, 5	3300 – 4100 MHz	80	
	CELL 1, 5	4500 – 5925 MHz	70	
	CELL 2, 6	617 – 663 MHz	50	
	CELL 2, 6	663 – 798 MHz	55	
	CELL 2, 6	798 – 894 MHz	55	
	CELL 2, 6	1695 – 2110 MHz	75	
	CELL 2, 6	2110 – 2700 MHz	80	
	CELL 2, 6	3300 – 4100 MHz	80	
	CELL 2, 6	4500 – 5925 MHz	70	
	CELL 3, 7	617 – 663 MHz	35	
	CELL 3, 7	663 – 798 MHz	40	
	CELL 3, 7	798 – 894 MHz	45	
	CELL 3, 7	1695 – 2110 MHz	70	
	CELL 3, 7	2110 – 2700 MHz	80	
	CELL 3, 7	3300 – 4100 MHz	75	
	CELL 3, 7	4500 – 5925 MHz	70	
	CELL 4, 8	617 – 663 MHz	50	
	CELL 4, 8	663 – 798 MHz	55	
	CELL 4, 8	798 – 894 MHz	65	
	CELL 4, 8	1695 – 2110 MHz	70	
	CELL 4, 8	2110 – 2700 MHz	80	
	CELL 4, 8	3400 – 4100 MHz	80	
	CELL 4, 8	4500 – 5925 MHz	70	
	WiFi 1 thru 4	2400 – 2483.5 MHz	80	
	WiFi 1 thru 4	4900 – 5900 MHz	70	
	Peak Gain (dBi)	CELL 1, 5	617 – 663 MHz	2.5
		CELL 1, 5	663 – 798 MHz	2.5
CELL 1, 5		798 – 894 MHz	4	
CELL 1, 5		1695 – 2110 MHz	6	
CELL 1, 5		2110 – 2700 MHz	6.5	
CELL 1, 5		3300 – 4100 MHz	7.5	
CELL 1, 5		4500 – 5925 MHz	7.5	
CELL 2, 6		617 – 663 MHz	2.5	

	CELL 2, 6	663 – 798 MHz	3.5
	CELL 2, 6	798 – 894 MHz	5
	CELL 2, 6	1695 – 2110 MHz	5
	CELL 2, 6	2110 – 2700 MHz	6.5
	CELL 2, 6	3300 – 4100 MHz	8
	CELL 2, 6	4500 – 5925 MHz	7
	CELL 3, 7	617 – 663 MHz	0.5
	CELL 3, 7	663 – 798 MHz	1
	CELL 3, 7	798 – 894 MHz	2
	CELL 3, 7	1695 – 2110 MHz	5
	CELL 3, 7	2110 – 2700 MHz	6.5
	CELL 3, 7	3300 – 4100 MHz	7.5
	CELL 3, 7	4500 – 5925 MHz	7.5
	CELL 4, 8	617 – 663 MHz	1
	CELL 4, 8	663 – 798 MHz	1
	CELL 4, 8	798 – 894 MHz	1.5
	CELL 4, 8	1695 – 2110 MHz	5
	CELL 4, 8	2110 – 2700 MHz	6
	CELL 4, 8	3300 – 4100 MHz	7.5
	CELL 4, 8	4500 – 5925 MHz	7.5
	WiFi 1 thru 4	2400 – 2483.5 MHz	5
	WiFi 1 thru 4	4900 – 5900 MHz	6
Return Loss 50 Ω (dB)	CELL 1, 5	617 – 663 MHz	8
	CELL 1, 5	663 – 798 MHz	10
	CELL 1, 5	798 – 894 MHz	10
	CELL 1, 5	1695 – 2000 MHz	8
	CELL 1, 5	2000 – 2700 MHz	10
	CELL 1, 5	3300 – 4100 MHz	10
	CELL 1, 5	4500 – 5000 MHz	12
	CELL 1, 5	5000 – 5925 MHz	8
	CELL 2, 6	617 – 663 MHz	10
	CELL 2, 6	663 – 798 MHz	8
	CELL 2, 6	798 – 894 MHz	6
	CELL 2, 6	1695 – 2000 MHz	8
	CELL 2, 6	2000 – 2700 MHz	10
	CELL 2, 6	3300 – 4100 MHz	10
	CELL 2, 6	4500 – 5000 MHz	12
	CELL 2, 6	5000 – 5925 MHz	8

	CELL 3, 7	617 – 663 MHz	8
	CELL 3, 7	663 – 798 MHz	6
	CELL 3, 7	798 – 894 MHz	5
	CELL 3, 7	1695 – 2000 MHz	8
	CELL 3, 7	2000 – 2700 MHz	10
	CELL 3, 7	3300 – 4100 MHz	10
	CELL 3, 7	4500 – 5000 MHz	12
	CELL 3, 7	5000 – 5925 MHz	8
	CELL 4, 8	617 – 663 MHz	8
	CELL 4, 8	663 – 798 MHz	10
	CELL 4, 8	798 – 894 MHz	9
	CELL 4, 8	1695 – 2000 MHz	8
	CELL 4, 8	2000 – 2700 MHz	10
	CELL 4, 8	3300 – 3700 MHz	10
	CELL 4, 8	4500 – 5000 MHz	12
	CELL 4, 8	5000 – 5925 MHz	8
	WiFi 1 thru 4	2400 – 2483.5 MHz	10
	WiFi 1 thru 4	4900 – 5900 MHz	10
Isolation (dB)	CELL-MIMO	617 – 652 MHz	14
	CELL-MIMO	652 – 859 MHz	16
	CELL-MIMO	859 – 894 MHz	18
	CELL-MIMO	1695 – 2110 MHz	16
	CELL-MIMO	2110 – 2700 MHz	18
	CELL-MIMO	3300 – 4100 MHz	22
	CELL-MIMO	4500 – 5925 MHz	25
	CELL-Adjacent	617 – 652 MHz	7
	CELL-Adjacent	652 – 859 MHz	6.5
	CELL-Adjacent	859 – 894 MHz	8
	CELL-Adjacent	1695 – 2110 MHz	12
	CELL-Adjacent	2110 – 2700 MHz	14
	CELL-Adjacent	3300 – 4100 MHz	22
	CELL-Adjacent	4500 – 5925 MHz	22
WiFi	2400 – 2483.5 MHz	12	
WiFi	4900 – 5900 MHz	22	
Polarization (dBi)	CELL, WiFi		Linear
Max Input Power (Watts)	CELL, WiFi		5

RF Connectors	CELL WiFi		SMA(M) RP-SMA(M)
RF Cable Type	CELL, WiFi		LSR200
<ul style="list-style-type: none"> Isolation, return loss, and peak gain do not include cable loss. CELL-MIMO isolation is the isolation between elements grouped for 4X4 MIMO for one modem. CELL-Adjacent isolation is the isolation between adjacent elements for separate modems. Electrical specifications based on antenna mounted away from other conductors. 			

GNSS Electrical Specifications

<i>ID & Unit</i>	<i>Port</i>	<i>Parameters</i>	<i>Typ.</i>
Antenna + Preamp Gain (dBic)	GPS	L1: 1563 – 1587 MHz L5: 1164 – 1189 MHz	28 26
Polarization	GPS		RHCP
Filter Rejection (dB)	GPS	1625 MHz	TBD
GNSS Preamp Voltage (mA)	GPS		3 to 5
GNSS Preamp Current (mA)	GPS		< 45mA
RF Connector	GPS		SMA(M)
RF Cable Type	GPS		LSR100

Ordering Guide

Maximum Configurations

<i>Config.</i>	<i>Part Number</i>	<i>Description</i>
14:1	PRO14CC9L4WD15B	9 Cellular, 4 Wi-Fi, L1/L5 Dual Band GPS, 15 ft Cable, Black
For customizations, such as Connector Type, Cable Length, Color, Configuration, and Branding, please reach out to Parsec at sales@parsec-t.com		

Part Number Key

Part Number Example for a 14:1 Cane Corso: PRO14CC9L4WD15B

<i>Description</i>	<i>Abbreviation</i>	<i>Part Number</i>
All PRO Series	PRO	PRO
Number of Antenna in Housing/Configuration	14:1	PRO14
Antenna Abbreviation for Cane Corso	CC	PRO14CC
Number of Cellular Elements	#L	PRO14CC9L
Number of Wi-Fi Elements	#W	PRO14CC9L4W
GPS Element: G = L1 GPS, D = L1/L5 Dual Band GPS	G or D	PRO14CC9L4WD
Cable Length Measured in Feet: 01 = 1 FT	01, 06, 15, etc	PRO14CC9L4WD15
Radome Color - B for Black, W for White	B or W	PRO14CC9L4WD15B
Customization options available: Custom Cable Lengths, Custom Colors, Custom Connectors, Cable Kits, Marine Grade, Custom Cable Labelling. MOQ Applicable. Please contact us for more information at sales@parsec-t.com .		

Hardware Accessories

<i>Accessories</i>	<i>Part Number</i>
Pole Mount Assembly	PTA1361
Mag Mount Assembly	PTA1336
Ground Plane with Adhesive Back, 20 in x 20 in, Can Be Cut to Size	PTA0587
Lightning Arrestor - SMA(F) to SMA(F)	PTA0476
Lightning Arrestor - N(F) to N(M)	PTA0736
SMA Wrench, Key Chain	PTA0194
Service: Cable Sleeving (Priced Per Ft)	Cable Sleeving